

**REMARKS**

By this amendment the Applicants respectfully delete claims 1-13 and add 14-32, therefore on entering this amendment claims 14-32 are all the claims pending in the present Application.

The Applicants attach a revised specification, rendering the objections to the specification moot. The Applicants assert that no new matter has been added. The Applicants also attach a red-lined version of the specification showing deletions and additions. Since the new specification contains a revised Abstract obviating the Examiner's objections to the Abstract, a separate Abstract has not been included.

The prior art rejections of the pre-existing claims are moot since they have been cancelled and new claims presented for Examination. However, the Applicants request the Examiner to consider the following general remarks distinguishing the present invention (as recited in the newly presented claims) from the cited references Ogawa and Stern.

The technique described in Ogawa can not detect the distance in real time because several images (possibly 4 to 5 images) are required therein to detect the distance. In the present invention, detecting the distance can be processed in real time because the distance is detected from only two images.

In Fig. 2 of Ogawa, and in accompanying passages, the distance can only be detected in discrete values. Using the present invention, the distance can be detected sequentially. For a non-limiting example, see Equation (13). Likewise, the gate passing light in Ogawa is formed in pulse train so that only the light emitting device which has the capability of high speed modulation such as laser emitting device can be used for the light source. On the other hand, in

the present invention, the changing rate of the illumination light is slower than the changing rate of the image pick-up gain. Therefore, light emitting device which has slower modulation speed such as light emitting diode (LED) can be used for the light source. These devices are safer and more like natural light, so that the detecting device becomes more suitable for practical use.

Further, to use the techniques of Ogawa, as described in Fig. 8 of Ogawa, a plurality of costly Image Intensifiers are required, making it impractical for common usage. Moreover, packaging a plurality of Image Intensifiers in a compact fashion is exceedingly difficult because the Image Intensifier uses high voltage power that requires larger terminals. The present invention can obtain the series of images of the object using only one Image Intensifier. Therefore, the present invention can reduce the cost and the size of the system.

Still further, referring to Fig. 2 of Ogawa, the gate of Image Intensifier needs to be opened for a certain amount of time even though the reflected light from the object is not acquired. (For instance the light acquisition is performed only once even though the image pick-up gain is opened 5 times). Therefore, the image obtained by the Image Intensifier is more sensitive to the background (environmental) light. On the other hand, in the present invention, the changing rate of the pick-up gain is set faster than the changing rate of the intensity of the illumination light. Hence, the image obtained becomes less sensitive to the background light.

Still further, referring to Fig. 9 of Ogawa, both the illumination light and the image pick-up gain are modulated in sinusoidal pattern. This could prevent the effective use of the dynamic range of the Image Intensifier. In this case, the acquired image would become darkest when the illumination light and the image pick-up gain are in opposite phase, but it will not become totally black (i.e. image level 0%). Therefore, this method is not capable of being used across the

whole dynamic range (image level 0% to 100%) of the Image Intensifier. On the other hand, the changing rate of the intensity level of the illumination is slower than the changing rate of the image pick-up gain. Hence, the image acquired includes the intensity level from 0% to 100% by using the dynamic range of the CCD most efficiently.

Clearly, the technique described in Ogawa uses a pulse light to illuminate, and detects the reflected light from the object only 'once' (see Fig. 2, Gate passing light A, B). Therefore, its detected signal level is very low. The low level of the detected signal, and the amount of the shot noise that occurs in the image intensifier prevents improving the signal/noise ratio of the signal used for detecting distance.

In the present invention, the illumination of the object and the detection of the reflected light from the object by the image intensifier is repeated a number of times within a period of time corresponding to a single frame of the video signal, and the image is obtained by an image pick-up element having storage effect. Therefore, the signal/noise ratio of the distance detecting signal is improved drastically.

When the set of the illumination and the detection has been done for  $M$  times and the detected signal stored by a CCD, the signal/noise ratio improves proportional to the value  $\sqrt{M}$ . The value of  $M$  ranges around 166000 to 830000 when the signals are stored in CCD at a frequency of 10MKz to 50MHz within a single image field (1/60 second). Therefore, the signal/noise ratio is improved drastically, reducing the effect from the shot noise occurring in the image intensifier. And by improving the signal/noise ratio, the resolution of distance detection is improved and the power of the illumination light can be decreased. Therefore, the distance detection of the present invention can be applied to obtain an image of the human figure.

Furthermore, the signal/noise ratio can be improved even when using a high resolution detecting device that has small detecting area for each pixel. In such a case, the distance detection technique of the present invention can be applied for a high definition image such as a HDTV.

In Stern, it is disclosed that the pulse duration might be 50-5000 psec (col. 7, line 65). In this case, the light intensity obtained in a single shot would be so low that even by amplifying it corresponding to the image pick-up gain, one can not improve the S/N ratio. And if the output power is increased to overcome this problem, the system becomes unusable for imaging live and moving objects. Further, the required environment and condition for using the system will be limited. On the other hand, in the present invention, the image is obtained a plurality of times by an image pick-up element having storage effect. For example, in a non-limiting way, a two-dimensional CCD can be used as the image pick-up element when the modulation cycle of the illumination light is set to 45 MHz. Approximately 750000 times of image can be obtained within a single frame of a video signal (a single frame corresponds to 1/60 second) with high SN ratio and enough sensibility. Moreover, the output power needed to obtain an image is low enough to use the system for imaging live and moving objects.

Further, Stern does not disclose detecting the distance in real time. There also is no disclosure about the timing of the real time detection or about which information is to be obtained. The method described in Figs. 5-9 of Stern has the advantage of broadening the detecting range. However, switching is required, so that many images are required to calculate the distance, making it impractical to perform real time processing.

The present invention, on the other hand can be applied to a TV camera. As an example of a specific application of some of the dependant claims, images are obtained a plurality of

times with the first image pick-up gain increasing with time, and the second image pick-up gain decreasing with time. And by using these two images and equation (26), the two-dimensional image having distance information whose unit corresponds to the pixels of CCD can be obtained. The present invention is capable of calculating the distance at a speed within a period of time corresponding to a frame of a video signal because it detects the distance sequentially on the basis of the two images.

Further, the present invention can broaden the detecting range by enlarging the value of  $\lambda$  (the modulation wavelength of image pick-up gain) in equation (26).

Still further, it is believed that the below listed equations are described in Stern et al. (U.S. Patent 5,216,259) are inconsistent and, as they read at present, would not constitute a relevant and useful teaching of the subject matter that the Examiner alleges Stern to be teaching.

$$\text{Equation1)} \quad t_T = g_I - I \frac{(S_{1,T})}{(S_{2,T})} \quad \text{in col. 5, line 65 of Stern}$$

$$\text{Equation2)} \quad g_I(t) = \frac{t - t_0}{t_I - t_0} \quad \text{in col. 6, line 1 of Stern}$$

$$\text{Equation3)} \quad g_I^{-1}(x) = t_0 + x(t_I - t_0) \quad \text{in col. 6, line 10 of Stern}$$

It appears that the Equation 1 is erroneous and is believed to be a misprint of

$$t_T = g_I^{-1}\left(\frac{S_{1,T}}{S_{2,T}}\right) \quad (\text{Equation1'})$$

The correct equation is referred to hereinafter as Equation1'. Only in such a case Equation 1' will be consistent with Equation3. This is because

$$t_T = t_0 + (t_I - t_0)\left(\frac{S_{1,T}}{S_{2,T}}\right)$$

However, it is unclear that whether the function  $g_I^{-1}(x)$  in the Equation1, 3 and the function  $g_I(t)$

in the Equation2 are equal or not. If those are equal, Equation2 and the Equation3 are not consistent. If those are different functions dependent on each other, the description of the Equations 1, 2 and 3 in Stern would not make any sense. Therefore, the technique described in Stern is indefinite and unclear.


In present invention, the distance "d" is clearly derived from Equation (17) or (18).

### CONCLUSION

In view of the above, reconsideration and allowance of this application are now believed to be in order, and such actions are hereby solicited. If any points remain in issue which the Examiner feels may be best resolved through a personal or telephone interview, the Examiner is kindly requested to contact the undersigned at the telephone number listed below.

The USPTO is directed and authorized to charge all required fees, except for the Issue Fee and the Publication Fee, to Deposit Account No. 19-4880. Please also credit any overpayments to said Deposit Account.

Respectfully submitted,



Chidambaram Subramanian  
Registration No. 43,355

SUGHRUE MION, PLLC  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

WASHINGTON OFFICE



23373

PATENT TRADEMARK OFFICE

Date: January 21, 2003

**APPENDIX**  
**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

**IN THE SPECIFICATION:**

Please **REPLACE** the specification as originally filed with the **SUBSTITUTE** specification attached herewith.

**IN THE CLAIMS:**

Please **CANCEL** claims 1-13 without prejudice or disclaimer.

Please **ADD** the following claims:

14. (NEW) A method of detecting three-dimensional information, comprising:
- illuminating an object sequentially with at least two illumination lights, at least one of the first or second of the two illumination lights with an intensity that varies with time;
- acquiring an image of the object illuminated by said at least two illumination lights by acquisition of a image pick-up gain having faster changing rate than a changing rate of the intensity of the illumination lights, wherein the image of the object is acquired a plurality of times by an image pick-up element having storage effect; and
- detecting a distance between individual points of the object on the basis of the image obtained; wherein
- the distance between respective points of the object is detected at a speed at which three-dimensional information is followed real time within a period of time corresponding to a frame of a video signal.

15. (NEW) A method of detecting three-dimensional information, comprising:

illuminating an object sequentially with at least two illumination lights, at least one of the first or second of the two illumination lights with an intensity that varies with time;

acquiring an image of the object illuminated by said at least two illumination light by acquisition of the given level of a image pick-up gain with shorter changing cycle than a changing cycle of the intensity of the illumination light, wherein the image of the object is acquired a plurality of times by an image pick-up element having storage effect; and

detecting a distance between individual points of the object on the basis of the image obtained; wherein

the distance between respective points of the object is detected at a speed at which three-dimensional information is followed real time within a period of time corresponding to a frame of a video signal.

16. (NEW) A method of detecting three-dimensional information, comprising:

illuminating an object with an illumination light;

acquiring an image of the object illuminated by the illumination light by acquisition of at least two image pick-up gain, at least one of said image pick-up gain changing with time, and the image pick-up gain having slower changing rate than a changing rate of the illumination light, wherein the image is acquired a plurality of times by an image pick-up element having storage effect; and

detecting a distance between individual points of the object on the basis of the image obtained; wherein



the distance between respective points of the object is detected at a speed at which three-dimensional information is followed real time within a period of time corresponding to a frame of a video signal.

17. (NEW) A method of detecting three-dimensional information, comprising:  
illuminating an object with an illumination light;  
acquiring an image of the object illuminated by the illumination light by acquisition of at least two image pick-up gain, at least one of said image pick-up gain changing with time, and the image pick-up gain having slower changing cycle than a illuminating time of the illumination light with given level of intensity, wherein the image of the object is acquired a plurality of times by an image pick-up element having storage effect; and

detecting a distance between individual points of the object on the basis of the image obtained; wherein

the distance between respective points of the object is detected at a speed at which three-dimensional information is followed real time within a period of time corresponding to a frame of a video signal.

18. (NEW) The method of detecting three-dimensional information as defined in claim 14, wherein

a first and a second optical images of the object illuminated by the first and the second illumination light are formed;

the first and the second optical images are obtained alternately by acquiring the first and the second optical images with a single image pick-up gain over a given period of time;

the first and the second images obtained are stored; and

the distance between respective points of the objects are detected by each of the first and second images and are detected sequentially for each frame of the video signal.

19. (NEW) The method of detecting three-dimensional information as defined in claim 15, wherein

a first and a second optical images of the object illuminated by the first and the second illumination light are formed;

the first and the second optical images are obtained alternately by acquiring the first and the second optical images with a single image pick-up gain over a given period of time;

the first and the second images obtained are stored; and

the distance between respective points of the objects are detected by each of the first and second images and are detected sequentially for each frame of the video signal.

20. (NEW) The method of detecting three-dimensional information as defined in claim 14, wherein the intensity of the first illumination light is increased or decreased with time, and the second illumination light has a given intensity.

21. (NEW) The method of detecting three-dimensional information as defined in claim 14, wherein the intensity of the first illumination light is increased with time, and the second illumination light is decreased with time.

22. (NEW) The method of detecting three-dimensional information as defined in claim 15, wherein the intensity of the first illumination light is increased or decreased with time, and the second illumination light has a given intensity.

23. (NEW) The method of detecting three-dimensional information as defined in claim 14, wherein the intensity of the first illumination light is increased with time, and the second illumination light is decreased with time.

24. (NEW) The method of detecting three-dimensional information as defined in claim 16, wherein

first and second optical images of the object illuminated by first and second illumination light which illuminate with single intensity over a predetermined period of time, are formed;

first and second images are obtained alternately by acquiring the first and second optical images with first and second image pick-up gains, the first and second images obtained are stored; and

the distance between respective points of the object is detected from the first and second images which are detected sequentially for each frame of the video signal.

25. (NEW) The method of detecting three-dimensional information as defined in claim 17, wherein

first and second optical images of the object illuminated by first and second illumination light which illuminate with single intensity over a predetermined period of time, are formed;

first and second images are obtained alternately by acquiring the first and second optical images with first and second image pick-up gains, the first and second images obtained are stored; and

the distance between respective points of the object is detected from the first and second images which are detected sequentially for each frame of the video signal.

26. (NEW) The method of detecting three-dimensional information as defined in claim 16, wherein the first image pick-up gain changes with time, and the second image pick-up gain is uniform.

27. (NEW) The method of detecting three-dimensional information as defined in claim 16, wherein the first image pick-up gain is increased with time, and the second image pick-up gain is decreased with time.

28. (NEW) The method of detecting three-dimensional information as defined in claim 17, wherein the first image pick-up gain changes with time, and the second image pick-up gain is uniform.

29. (NEW) The method of detecting three-dimensional information as defined in claim 17, wherein the first image pick-up gain is increased with time, and the second image pick-up gain is decreased with time.

30. (NEW) A device for detecting three-dimensional information pertaining to an object comprising:

a projection section projecting illumination light having given intensity on the object;  
an image pick-up section acquiring an image of the object with a given image pick-up gain;

a storage section temporary storing the image acquired by the image pick-up section; and  
a signal processing section which calculates a distance between respective points of the object on the basis of intensity level information included in a video signal output from the image pick-up section,

wherein the distance between respective points of the object is detected at a speed at which the three-dimensional information are followed real time within a period of time corresponding to the frame of a video signal.

31. (NEW) The device for detecting three-dimensional information as defined in claim 30, wherein the projection section comprises:

a law diode or a light-emitting diode whose light is modulated in accordance with an electric signal, and


a modulator capable of modulating light emitted from the laser diode or the light-emitting diode.

32. (NEW) The device for detecting three-dimensional information as defined in claim 30, wherein the image pick-up section comprises:

imaging means for producing an optical image upon receipt of light reflected from the object;

an image pick-up element which captures the optical image and outputs a video signal;  
and

an image intensifier with gating operation which is disposed between the imaging means and the image pick-up element and which controls an image pick-up gain.



{[DOCUMENT NAME]} SPECIFICATION

~~{[TITLE OF THE INVENTION]} METHOD AND DEVICE FOR DETECTING THREE-DIMENSIONAL INFORMATION~~

{WHAT IS CLAIMED IS:}

{Claim 1} {

## METHOD AND DEVICE FOR DETECTING THREE-DIMENSIONAL INFORMATION

### DETAILED DESCRIPTION OF THE INVENTION

#### Field of the Invention

- [01] The present invention relates to a method and apparatus for detecting three-dimensional information pertaining to an object which can be applied to acquisition of a three-dimensional image, and more particularly, to a method and device which detects three-dimensional information pertaining to an object by two-dimensionally measuring the distance between points of the object at a speed at which the three-dimensional information can be followed in real time within a period relating to a frame of a video signal (hereinafter referred to simply as a "frame period").

#### Prior Art

- [02] The following methods have conventionally been employed as techniques for measuring the distance between an object and an image acquisition device or three-dimensional information through use of light.
- [03] (1) As shown in FIG. 12, a pulse laser beam or a laser beam whose amplitude is modulated by a sinusoidal wave is radiated onto an object, and the distance between the object and the laser is measured on the basis of a period of time during which reflected light returns to the laser or a modulated phase of the reflected light.
- [04] (2) As shown in FIG. 13, under the method (1), the distance between the respective points of an object is two-dimensionally measured by two-dimensionally scanning the laser beam over the object.
- [05] (3) As shown in FIG. 14, illumination light is modulated by a sinusoidal signal, and a light amplification gain of an image intensifier disposed in front of an image pick-up element is modulated through use of the sinusoidal signal. An optical image formed by collecting light reflected from the object through use of a lens includes a modulated phase corresponding to the distance between the object and the lens. Of an optical image input to the image intensifier, only a portion of the image whose phase matches a change in the light amplification gain is emphasized. As a result, the points of the object equidistantly spaced away from the lens can be two-dimensionally captured in the form of contour lines. The principle behind the third method is described in



detail in Japanese Patent Application Laid-Open No. Hei-6-294868 entitled "Imaging Laser Radar Device."

**Problem to be Solved by the Invention**

- [06] According to the method described in connection with (1), the distance between a single point of the object and the laser is measured, and hence three-dimensional information pertaining to the object cannot be produced. In order to acquire three-dimensional information by measuring two-dimensional distribution of the distance among the respective points of the object, the light beam must be moved so as to two-dimensionally scan the object as mentioned in the method (2). Alternatively, according to method (3), since only portions of the object equidistantly spaced away from the lens are extracted, the modulated phase of illumination light must be changed to only a required extent in order to acquire three-dimensional information pertaining to the entirety of the object. Methods (2) and (3) require two-dimensional raster-scanning of an illumination light beam and a change in the modulated phase of the illumination light. Therefore, under these methods, acquiring three-dimensional information pertaining to the object at a speed equal to the frame period of a video signal is difficult. Therefore, the methods are not suitable for acquiring a three-dimensional image.
- [07] The object of the present invention is to provide a method and device which solve the problem of the conventional technique, are suitable for

acquiring a three-dimensional image, and enable detection of three-dimensional information pertaining to an object within a period of time corresponding to the frame of a video signal.

#### **Means for Solving the Problem**

- [08] A three-dimensional information detecting method of the present invention comprises steps of: forming an image of an object illuminated by illumination of the modulated light having given intensity as an optical image, and detecting the distance between individual points of the object on the basis of an image obtained by acquisition of the optical image with a given image pick-up gain. Under this method, either the given intensity or the image pick-up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal. By utilization of the intensity or image pick-up gain which is changed with time, the two-dimensional distribution of intensity of light including information pertaining to the distance between the respective points of the object is acquired. Accordingly, the distance between respective points of the object can be determined on the basis of the intensity level information, whereby three-dimensional information pertaining to the object can be detected.

[09] The image of the object can be acquired a plurality of times within the period of time corresponding to one frame of the video signal. In such a case, a signal-to-noise ratio (S/N) is improved by means of the storage effect of the image pick-up element, and the image pick-up intensity is enhanced.

[10] A device for detecting three-dimensional information of the present invention comprises a projection section capable of projecting illumination light having given intensity on an object; an image pick-up section capable of acquiring an image of the object with a given image pick-up gain; and a signal processing section which calculates the distance between respective points of the object on the basis of intensity level information included in a video signal output from the image pick-up section. Either the given intensity or the image pick-up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal. By utilization of the intensity or image pick-up gain which is changed with time, the two-dimensional distribution of intensity of the image of the object that is acquired by the image pick-up section includes information pertaining to the distance between the respective points of the object. Accordingly, the signal processing section can calculate the distance between respective points of the object on the basis of the intensity level information. The device can acquire an image of the object

within a sufficiently short period of time. So long as the signal processing section can compute the distance between respective points of the object at sufficient speed, the distance between respective points of the object can be detected at a speed at which the three-dimensional information can be followed within a period of time corresponding to the frame of a video signal.

### **Embodiments of the Invention**

- [11] Various embodiments of the present invention will be described hereinbelow by reference to the accompanying drawings. FIG. 1 is a schematic diagram showing a three-dimensional information detecting device according to a first embodiment of the present invention. The device comprises a projection section 10 capable of illuminating an object with illumination light S6 whose amplitude is modulated; an image pick-up section 11 which receives light S7 reflected from the object while changing an image pick-up gain with time and captures an optical image of the object; a signal processing section 7 for converting video signals S41 and S42 output from the image pick-up section 11 into a three-dimensional information signal S5; and a signal generation section 1 which produces an illumination light modulation signal S1, an image pick-up modulation signal S2, and a control signal S3. The specific configuration of these constituent elements will be described later.

- [12] The principle behind the three-dimensional information detecting method of the present invention which uses the device shown in FIG. 1 will be described by reference to a specific example in which the intensity of the light source or an image pick-up gain is linearly changed with time.
- [13] The three-dimensional information detecting method according to a first embodiment of the present invention will be described by reference to FIGS. 2 and 3. As shown in FIG. 2A, the intensity  $I$  of illumination light is subjected to amplitude modulation, to thereby obtain  $I=St$ , where “ $t$ ” represents time and “ $S$ ” represents the rate of increase in intensity ( $=2I_0/T$ ). As shown in FIG. 2B, the intensity  $I_R$  of light reflected from the object which is spaced by only distance “ $d$ ” away from an exit of the projection section 10 is changed, as specified by  $S(t-2d/v)$ , with a delay equal to a duration of time during which light travels between the projection section and the object ( $=2d/v$ , where “ $v$ ” represents light speed). If reflected light having intensity  $I_+$  at certain time  $t=t_0$  is acquired for only a short period of time  $\Delta t$  ( $\ll T$ ) while an image pick-up gain “ $g$ ” is taken as  $g=g_0$  ( $>0$ ), the intensity  $I_+$  of the resultant image is expressed by Equation (1).

$$I_+ g_0 = \frac{\sigma}{(4\pi d^2)^2} g_0 S(t_0 - 2d/v) \dots (1)$$

where  $\sigma$  represents the area of the backward scattering cross-section of an object. Equation (1) includes information pertaining to the distance between the object and the three-dimensional information detecting

device. In order to eliminate the dependency of term  $\sigma/(4\pi d^2)^2$ , the second image of the object is acquired while the intensity  $I$  of illumination light is uniformly maintained at  $I=I_r$  for a short period of time  $\Delta t$  from time  $T'$ . At this time, luminous intensity  $I_{ref}g_0$  is expressed by Equation (2).

$$I_{ref}g_0 = \frac{\sigma}{(4\pi d^2)^2} g_0 I_r \dots(2)$$

The following equation is derived from Equations (1) and (2).

$$R_+ = \frac{I_+g_0}{I_{ref}g_0} = \frac{S(t_0 - 2d/v)}{I_r} \dots(3)$$

From Equation (3), we have

$$d = \frac{1}{2}v\left(t_0 - \frac{I_r}{S}R_+\right) \dots(4).$$

Further, let  $I_r=I_0$ ; then

$$d = \frac{1}{2}v\left(t_0 - \frac{T}{2}R_+\right) \dots(5).$$

From Equation (4) or (5), we have distance “d.”

- [14] As mentioned above, the intensity of respective points of an optical image formed by collection of the light reflected from the object exposed to amplitude-modulated light includes information pertaining to the distance between the three-dimensional information detecting device and

a corresponding point of the object. So long as the object is captured in the manner as mentioned above and Equation (4) or (5) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be detected.

- [15] As shown in FIGS. 3A and 3B, even when the intensity  $I$  of the light source diminishes, as specified by  $I=I_0-St$ , the distance “ $d$ ” can be obtained in the same manner as mentioned previously.

$$I_-g_0 = \frac{\sigma}{(4\pi d^2)^2} g_0 \{I_0 - S(t_0 - 2d/v)\} \dots(6)$$

$$R_- = \frac{I_-g_0}{I_{ref} g_0} = \frac{I_0 - S'(t_0 - 2d/v)}{I_r} \dots(7)$$

$$d = \frac{1}{2}v \left( t_0 - \frac{I_0 - I_r R_-}{S} \right) \dots(8)$$

Further, let  $I_r=I_0$ ; then

$$d = \frac{1}{2}v \left\{ t_0 - \frac{T}{2}(1 - R_-) \right\} \dots(9).$$

As in the case of the previous example, the optical image formed by collection of light reflected from the object. So long as Equation (8) or (9) is applied to each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally

obtained, whereby three-dimensional information pertaining to the object can be obtained.

- [16] Referring to FIG. 4, a three-dimensional information detecting method according to a second embodiment of the present invention will now be described. As shown in FIG. 4, the object is illuminated while the intensity of illumination light is modulated by employment of a triangular waveform. An optical image of reflected light is acquired twice; in other words, an optical image of reflected light whose intensity is  $I_+$  is acquired at time  $t=t_0$  for only a short period of time  $\Delta t$  ( $\ll T$ ) with an image pick-up gain  $g=g_0(>0)$ , and an optical image of reflected light whose intensity is  $I_-$  is acquired at time  $t=t_0+T/2$  for only a short period of time  $\Delta t$  ( $\ll T$ ) with the image pick-up gain  $g=g_0(>0)$ . From Equations (1) and (6), we have

$$R = \frac{I_+ g_0}{I_- g_0} = \frac{S(t_0 - 2d/v)}{I_0 - S(t_0 - 2d/v)} \dots (10)$$

$$d = \frac{1}{2} v \left\{ t_0 - \frac{I_0}{S} \left( \frac{R}{1+R} \right) \right\} \dots (11).$$

Let the wavelength of illumination light modulated by a triangular waveform be defined as  $\lambda = vT$ ; then from  $S = I_0/(T/2)$ , we have

$$d = \frac{1}{2} v t_0 - \frac{\lambda}{4} \left( \frac{R}{1+R} \right) \dots (12).$$



Further, if  $t_0$  is set to a given value, distance “d” can be expressed as a relative distance with reference to a reference point  $d_{ref}$ . Equation (13) represents a relative distance with reference to  $d_{ref}=0$  when  $t_0=T/4$ .

$$d = \frac{\lambda}{8} \left( \frac{1-R}{1+R} \right) \dots(13)$$

As in the case of the first embodiment, the optical image is formed by collection of light reflected from the object. So long as any one of Equations (11), (12), and (13) is applied to each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be obtained.

- [17] According to a method which is complementary to the three-dimensional information detecting methods described in connection with the first and second embodiments, three-dimensional information pertaining to an object can be detected by capturing the image of the object with an image pick-up gain, which linearly increases or decreases, through use of illumination light modulated in the form of a pulse for a short period of time.
- [18] A three-dimensional information detecting method according to a third embodiment of the present invention will be described by reference to FIGS. 5 and 6. As shown in FIG. 5A, illumination light is modulated such that an image pick-up gain “g” is linearly increased (i.e.,  $g=Ut$ ). Further,

an object is exposed to light which illuminates like a pulse with intensity  $I=I_0$  for only a short period of time  $\Delta t$  ( $\ll T$ ). Here,  $U$  designates the rate of increase in image pick-up sensitivity ( $=2g_0/T$ ). The image pick-up gain  $g_+$  obtained when the light reflected from the object that is spaced only distance “ $d$ ” from the three-dimensional information detecting device has returned to the image pick-up device becomes  $g_+=U(t_0+2d/v)$ . The intensity  $I_{r0}g_+$  of an image resulting from the reflected light being captured is expressed by Equation (14).

$$I_{r0}g_+ = \frac{\sigma}{(4\pi d^2)^2} I_0 U(t_0 + 2d/v) \dots(14)$$

Further, in order to eliminate the dependency of term  $\sigma/(4\pi d^2)^2$ , the object is illuminated for a short period of time  $\Delta t$  from time  $T'$  while the image pick-up gain “ $g$ ” is uniformly maintained at  $g=g_r$ . At this time, luminous intensity  $I_{r0}g_r$  is expressed by Equation (15).

$$I_{r0}g_r = \frac{\sigma}{(4\pi d^2)^2} I_0 g_r \dots(15)$$

The following equation is derived from Equations (14) and (15).

$$R_+ = \frac{I_{r0}g_+}{I_{r0}g_r} = \frac{U(t_0 + 2d/v)}{g_r} \dots(16)$$

From Equation (16), we have

$$d = \frac{1}{2} v \left( -t_0 + \frac{g_r}{U} R_+ \right) \dots(17)$$

Further, suppose  $g_r = g_0$ ; the following expression is derived from  $U = g_0/(T/2)$ .

$$d = \frac{1}{2}v \left( -t_0 + \frac{T}{2}R_+ \right) \dots (18)$$

The distance “d” is derived from Equation (17) or (18). As in the case of the first and second embodiments, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (17) or (18) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be detected.

- [19] As shown in FIG.6A, even when the image pick-up gain “g” decreases ( $g = g_0 - Ut$ ), the distance “d” can be obtained in the same manner as that employed previously.

$$I_{ro}g_- = \frac{\sigma}{(4\pi d^2)^2} I_0 \{g_0 - U(t_0 + 2d/v)\} \dots (19)$$

$$R_- = \frac{I_{ro}g_-}{I_{ro}g_r} = \frac{g_0 - U(t_0 + 2d/v)}{g_r} \dots (20)$$

$$d = \frac{1}{2}v \left( -t_0 + \frac{g_0 - R_-g_r}{U} \right) \dots (21)$$

Further, let  $g_r = g_0$ ; then

$$d = \frac{1}{2}v \left\{ -t_0 + \frac{T}{2}(1 - R_-) \right\} \dots(22)$$

As mentioned previously, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (21) or (22) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be detected.

[20] A three-dimensional information detecting method according to a fourth embodiment of the present invention will now be described by reference to FIGS. 7A and 7B. As shown in FIG. 7A, the image pick-up gain “g” is modulated through use of a triangular waveform, and an object is illuminated twice; in other words, an optical image is illuminated at time  $t=t_0$  through use of light which illuminates in a pulsating manner with intensity  $I=I_0$  for only a period of time  $\Delta t$  ( $\ll T$ ), and an object is illuminated at time  $t=t_0+T/2$  through use of light which illuminates in a pulsating manner with intensity  $I=I_0$  for only a period of time  $\Delta t$  ( $\ll T$ ).

From Equations (15) and (19), we have

$$R = \frac{I_{ro}g_+}{I_{ro}g_-} = \frac{U(t_0 + 2d/v)}{g_0 - U(t_0 + 2d/v)} \dots(23)$$

$$d = \frac{1}{2}v \left\{ -t_0 - \frac{g_0}{U} \left( \frac{R}{1+R} \right) \right\} \dots(24)$$

Suppose the wavelength of the triangular waveform used for modulating the image pick-up sensitivity is defined as  $\lambda=vT$  for convenience's sake, the following expression is derived from  $U=g_0/(T/2)$ .

$$d = -\frac{1}{2}vt_0 - \frac{\lambda}{4}\left(\frac{R}{1+R}\right) \dots(25)$$

As in the case of the second embodiment, if  $t_0$  is set to a given value, the distance “d” can be expressed as a relative distance with reference to the reference point  $d_{\text{ref}}$ . Equation (26) represents the relative distance with reference to  $d_{\text{ref}}=0$  when  $t_0=T/4$ .

$$d = -\frac{\lambda}{8}\left(\frac{1-R}{1+R}\right) \dots(26)$$

As mentioned previously, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (24), (25), or (26) is applied to each of the pixels of the image, information pertaining to the distance between the three-dimensional information detecting device and the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be detected.

- [21] A method of increasing the image pick-up sensitivity in each of the previous embodiments will now be described. In the previously embodiments, acquisition of an image having intensity  $I_+g_0$  and an image having intensity  $I_{\text{ref}}g_0$  for the purpose of determining  $R_+$ , acquisition of an

image having intensity  $I_g$  and an image having intensity  $I_{refg_0}$  for the purpose of obtaining  $R$ , or acquisition of an image having intensity  $I_{+g_0}$  and an image having intensity  $I_{g_0}$  for the purpose of determining  $R$  is performed a plurality of times within the period of time corresponding to one frame of an image signal. As a result, the signal-to-noise ratio (S/N) is improved by the storage effect of the image pick-up element used for acquiring an image, whereby the image pick-up sensitivity is improved.

[22] The configuration of the three-dimensional information detecting device shown in FIG. 1 will now be described in detail by reference to the drawings.

[23] FIG. 8 shows a projection section 10a which is another embodiment of the projection section 10 shown in FIG. 1. The projection section 10a comprises a light-emitting element 31 whose light can be directly modulated by an illumination modulation signal  $S_1$ , and an illumination optical system 30 which is disposed opposite the light exit surface of the light-emitting element 31, which shapes the light emitted from the light-emitting element 31, and which directs the light toward the object. For example, a semiconductor laser diode or a semiconductor light-emitting diode can be employed as the light-emitting element 31. When such a light-emitting element is activated directly by the illumination light modulation signal  $S_1$  which is an electric signal, the element can emanate light whose intensity is changed at high speed. The thus-produced light is shaped by means of an illumination optical system 30 so as to illuminate

an object, whereby illumination light S6 is produced. Accordingly, illumination light whose intensity is arbitrarily changed at high speed, such as increment light, decrement light, or pulse-like light, can be realized by means of the illumination light modulation signal S1. As mentioned above, the projection section having the configuration shown in FIG. 8 can be used as means for controlling the intensity of illumination light under the three-dimensional information detecting method of the present invention.

- [24] FIG. 9 shows a projection section 10b which is still another embodiment of the projection section 10 shown in FIG. 1. The projection section 10b comprises a light-emitting element 33 which outputs given light; an external modulator 32 which is disposed opposite the light exit surface of the light-emitting element 33 and indirectly modulates the light emanated from the light-emitting element 33 in accordance with the illumination light modulation signal S1; and an illumination optical system 30 which shapes the light output from the external modulator 32 and is directed toward the object. An electro-optical effect light modulator or an electro-acoustic effect modulator can be used as the external modulator 32. Light whose intensity is modulated arbitrarily and at high speed can be produced by indirect modulation of the given light 34 output from the light-emitting element 34, through use of the external modulator 32. The thus-produced light is shaped by the illumination optical system 30 so as to illuminate an object, whereby the illumination light S6 is produced.

Like the projection section shown in FIG. 8, the projection section whose configuration is shown in FIG. 9 can be used as means for controlling the intensity of illumination light under the three-dimensional information detecting method of the present invention.

- [25] FIG. 10 shows an image pick-up section 11 which is another embodiment of the image pick-up section 11 shown in FIG. 1. The image pick-up section 11 comprises a lens 4 which receives light reflected from an object and produces an optical image, an image pick-up element 6 which is disposed behind the lens 4 and picks up the optical image output from the lens 4, and an image split circuit 22 which outputs a video signal pertaining to a plurality of screens included in the electric signal output from the image pick-up element 6 while the video signal is divided into respective screens. Further, an image intensifier with gating operation 5 capable of controlling the image pick-up gain in accordance with the image pick-up gain modulation signal S2, which is an electric signal, is attached to the front surface of the image pick-up element 6 via an optical image transfer optical system 20. A fiber plate or lens can be used as the optical image transfer optical system 20. Light S7 reflected from an object is formed on a photo-electric screen of the image intensifier with gating operation 5 by means of the lens 4. An optical image amplified by the image intensifier with gating operation 5 is transferred by the optical image transfer optical system 20 and input to the photo-electric screen of the image pick-up element 6.



- [26] The light amplification gain of the image intensifier with gating operation 5 can be controlled at high speed by means of a voltage to be applied to a gate 21 of the image intensifier with gating operation 5. In the image pick-up section 11, the image pick-up gain can be changed at high speed by application of the image pick-up gain modulation signal S2 to the gate 21. Accordingly, an image pick-up gain which is changed arbitrarily at high speed, such as a pulse-like image pick-up gain to be used for releasing a shutter for only a short period of time or an increment or decrement image pick-up gain, can be achieved.
- [27] In a case where the image pick-up section 11 is used in each of the previous embodiments, the image pick-up section 11 must acquire an image twice for calculating  $R_+$ ,  $R_-$ , or  $R$  and output a video signal pertaining to two screens per frame while the signal is split. To this end, in the image pick-up section 11, the image pick-up element 6 is activated twice as fast as it is activated in normal times, to thereby acquire a video signal pertaining to two images. The video signal is output from the image split circuit 22 while being divided into a video signal S41 and a video signal S42. Alternatively, so long as there is employed an image pick-up element capable of acquiring an image for each pixel and at every image pick-up operation while effecting switching between the video signal S41 and the video signal S42, the video signals 41 and 42 can be output while they are split.

- [28] As mentioned above, the image pick-up section 11 whose configuration is shown in FIG. 10 can be used as means for controlling the image pick-up gain under the three-dimensional information detecting method of the present invention. Further, the image pick-up section 11 can also be used as means for outputting two video signals resulting from twice-acquisition of an image while being split.
- [29] FIG. 11 shows a signal processing section 7 which is an embodiment of the signal processing section 7 shown in FIG. 1. In this signal processing section 7, an internal signal is driven at a rate—which is the same as the number of pixels of the video signal—and is subjected to pipe-line processing in individual circuits. After a synchronous signal has been eliminated from the video signals S41 in a synchronous signal separation circuit 41, the video signal S43 is stored in an image pick-up level storage circuit 1, and the video signal S44 is stored in an image pick-up level storage circuit 2. A signal S45 output from the image pick-up level storage circuit 1 and a signal S46 output from the image pick-up level storage circuit 2 are input to a computation circuit 44, where  $R_+$ ,  $R_-$ , or  $R$  and the distance “d” are computed. A signal S47 output from the computation circuit 44 is a time-series signal resulting from two-dimensional scanning of the distance between the respective sections of the object. Time-axis fluctuations in the signal S47 are corrected by a storage circuit 45, and a synchronous signal is added to the thus-corrected signal by a synchronous signal addition circuit 46. The signal is output as a

three-dimensional signal S5 whose video level corresponds to the value of information pertaining to the distance "d" between the respective points of the object. As mentioned above, the signal processing section 7 whose configuration is shown in FIG. 11 can be used as a means for computing three-dimensional information pertaining to an object in real time under the three-dimensional information detecting method of the present invention.

#### **Advantageous Result of the Invention**

- [30] As has been described in detail, the present invention enables two-dimensional determination of the distance between individual points of an object at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal, as well as detection of three-dimensional information, by utilization of information pertaining to the intensity of an image of the object acquired under condition that either the intensity of illumination light or an image pick-up gain is changed with time. Consequently, the method and apparatus of the present invention can be suitably used for acquiring a three-dimensional motion picture of an object.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

- [31] FIG. 1 is a schematic diagram showing the configuration of a three-dimensional information detecting device according to a first embodiment of the present invention;

- [32] FIG. 2 is an illustration for describing a method of detecting three-dimensional information by utilization of illumination light which linearly increases and has given intensity and a pulse-like image pick-up gain in combination, wherein FIG. 2A shows a time-varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 2B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";
- [33] FIG. 3 is an illustration for describing a method of detecting three-dimensional information by utilization of illumination light which linearly decreases and has given intensity and a pulse-like image pick-up gain in combination, wherein FIG. 3A shows a time-varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 3B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";
- [34] FIG. 4 is an illustration for describing a method of detecting three-dimensional information by utilization of illumination light which linearly increases and decreases and has given intensity and a pulse-like image pick-up gain in combination, wherein FIG. 4A shows a time-varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 4B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light

reflected from an object spaced away from a projection section by only distance "d";

- [35] FIG. 5 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick-up gain which linearly increases and illumination light having pulse-like intensity in combination, wherein FIG. 5A shows a time-varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 5B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";
- [36] FIG. 6 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick-up gain which linearly decreases and illumination light having a pulse-like intensity in combination, wherein FIG. 6A shows a time-varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 6B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";
- [37] FIG. 7 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick-up gain which linearly increases and decreases and illumination light having pulse-like intensity in combination, wherein FIG. 7A shows a time-

varying waveform determined by the intensity  $I$  of illumination light and an image pick-up gain "g," and FIG. 7B shows a time-varying waveform determined by the image pick-up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";

- [38] FIG. 8 is a schematic diagram showing the configuration of a projection section equipped with a light-emitting element whose light is directly modulated;
- [39] FIG. 9 is a schematic diagram showing the configuration of a projection section equipped with a light-emitting element whose light is indirectly modulated;
- [40] FIG. 10 is an illustration showing the configuration of an image pick-up section employing an image intensifier (II) with gating operation;
- [41] FIG. 11 is an illustration showing the configuration of a signal processing section;
- [42] FIG. 12 is an illustration showing a conventional method of measuring the distance between an object and a three-dimensional information detecting device on the basis of a lag time or modulated phase of a reflected laser beam;
- [43] FIG. 13 is an illustration showing a conventional method of activating a laser beam so as to effect two-dimensional scanning; and
- [44] FIG. 14 is an illustration showing the configuration of a conventional imaging laser radar apparatus.

### **Description of the Reference Numerals**

**1 ... signal generation section, 4 ... lens, 5 ... image intensifier with gating operation, 6 ... image pick-up element, 7 ... signal processing section, 10 ... projection section, 11 ... image pick-up section, 20 ... optical image transfer optical system, 21 ... gate, 22 ... image split circuit, 30 ... illumination optical system, 31 ... light-emitting element, 32 ... external modulator**

**WHAT IS CLAIMED IS:**

1.] A method of detecting three-dimensional information, comprising steps of:

forming an image of an object illuminated by illumination light having given intensity as an optical image; and

detecting a distance between individual points of the object on the basis of an image obtained by acquisition of the optical image with a given image pick-up gain, wherein either the given intensity or the image pick-up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal.

~~{{Claim 2}}~~

[2.] The method of detecting three-dimensional information as defined in claim 1, wherein first and second optical images of the object illuminated by first and second illumination light, either of which includes time-varying intensity, are formed; first and second images are obtained by acquiring the first and second optical images with a single image pick-up gain over a given period of time; and the distance between respective points of the object can be detected on the basis of the first and second images at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal.



~~{{Claim 3}}~~

[3.] The method of detecting three-dimensional information as defined in claim 2, wherein the intensity of the first illumination light is increased or decreased with time, and the second illumination light has a given intensity.

~~{{Claim 4}}~~

[4.] The method of detecting three-dimensional information as defined in claim 2, wherein the intensity of the first illumination light is increased with time, and the second illumination light is decreased with time.

~~{{Claim 5}}~~

[5.] The method of detecting three-dimensional information as defined in claim 1, wherein there are formed first and second optical images of the object illuminated by first and second illumination light which illuminate with single intensity over a predetermined period of time; and the distance between respective points of the object is detected from the first and second images which are produced by acquisition of the first and second optical images with the first and second image pick-up gains, either of which is changed with time, at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal.

~~{{Claim 6}}~~

[6.] The method of detecting three-dimensional information as defined in claim 5, wherein the first image pick-up gain is increased or decreased with time, and the second image pick-up gain is uniform.

~~{{Claim 7}}~~

[7.] The method of detecting three-dimensional information as defined in claim 5, wherein the first image pick-up gain is increased with time, and the second image pick-up gain is decreased with time.

~~{{Claim 8}}~~

[8.] The method of detecting three-dimensional information as defined in any one of claims 1 through 7, wherein the image is acquired a plurality of times within a period of time corresponding to the frame of a video signal.

~~{{Claim 9}}~~

[9.] A device for detecting three-dimensional information pertaining to an object comprising:

a projection section capable of projecting illumination light having given intensity on the object;

an image pick-up section capable of acquiring an image of the object with a given image pick-up gain; and

a signal processing section which calculates the distance between respective points of the object on the basis of intensity level information

included in a video signal output from the image pick-up section, wherein either the given intensity or the image pick-up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which the three-dimensional information can be followed real time within a period of time corresponding to the frame of a video signal.

~~{{Claim}}~~

10~~{{}}~~[.] The device for detecting three-dimensional information as defined in claim 9, wherein the projection section is equipped with a light-emitting element whose light can be modulated in accordance with an electric signal.

~~{{Claim}}~~

11~~{{}}~~[.] The device for detecting three-dimensional information as defined in claim 9, wherein the projection section comprises a light-emitting element, and a modulator capable of modulating light emitted from the light-emitting element.

~~{{Claim}}~~

12~~{{}}~~[.] The device for detecting three-dimensional information as defined in claim 9, wherein the image pick-up section comprises:

imaging means for producing an optical image upon receipt of light reflected from the object;

an image pick-up element which captures the optical image and outputs a video signal; and

an image intensifier with gating operation which is disposed between the imaging means and the image pick-up element and which can control an image pick-up gain.

{{Claim}}

13{{}}[.] The device for detecting three-dimensional information as defined in claim 9, wherein the signal processing section calculates the distance between respective points of the object according to the method defined in any one of claims 2 through 8.

~~{{DETAILED DESCRIPTION OF THE INVENTION}}~~

{0001}

{Field of the Invention}

~~The present invention relates to a method and apparatus for detecting three dimensional information pertaining to an object which can be applied to acquisition of a three dimensional image, and more particularly, to a method and device which detects three dimensional information pertaining to an object by two dimensionally measuring the distance between points of the object at a speed at which the three dimensional information can be followed in real time within a period relating to a frame of a video signal (hereinafter referred to simply as a "frame period").~~

{0002}

{Prior Art}

~~The following methods have conventionally been employed as techniques for measuring the distance between an object and an image acquisition device or three dimensional information through use of light.~~

{0003}

~~(1) As shown in FIG. 12, a pulse laser beam or a laser beam whose amplitude is modulated by a sinusoidal wave is radiated onto an object, and the distance between the object and the laser is measured on the basis of a period of time during which reflected light returns to the laser or a modulated phase of the reflected light.~~

{0004}

~~(2) As shown in FIG. 13, under the method (1), the distance between the respective points of an object is two dimensionally measured by two dimensionally scanning the laser beam over the object.~~

{0005}

~~(3) As shown in FIG. 14, illumination light is modulated by a sinusoidal signal, and a light amplification gain of an image intensifier disposed in front of an image pick up element is modulated through use of the sinusoidal signal. An optical image formed by collecting light reflected from the object through use of a lens includes a modulated phase corresponding to~~

~~the distance between the object and the lens. Of an optical image input to the image intensifier, only a portion of the image whose phase matches a change in the light amplification gain is emphasized. As a result, the points of the object equidistantly spaced away from the lens can be two dimensionally captured in the form of contour lines. The principle behind the third method is described in detail in Japanese Patent Application Laid Open No. Hei-6-294868 entitled "Imaging Laser Radar Device."~~

~~{0006}~~

~~[Problem to be Solved by the Invention]~~

~~According to the method described in connection with (1), the distance between a single point of the object and the laser is measured, and hence three dimensional information pertaining to the object cannot be produced. In order to acquire three dimensional information by measuring two dimensional distribution of the distance among the respective points of the object, the light beam must be moved so as to two dimensionally scan the object as mentioned in the method (2). Alternatively, according to method (3), since only portions of the object equidistantly spaced away from the lens are extracted, the modulated phase of illumination light must be changed to only a required extent in order to acquire three dimensional information pertaining to the entirety of the object. Methods (2) and (3) require two dimensional raster-scanning of an illumination light beam and a change in the modulated phase of the illumination light. Therefore, under these methods, acquiring three~~

~~dimensional information pertaining to the object at a speed equal to the frame period of a video signal is difficult. Therefore, the methods are not suitable for acquiring a three dimensional image.~~

{0007}

~~The object of the present invention is to provide a method and device which solve the problem of the conventional technique, are suitable for acquiring a three dimensional image, and enable detection of three dimensional information pertaining to an object within a period of time corresponding to the frame of a video signal.~~

{0008}

[Means for Solving the Problem]

~~A three dimensional information detecting method of the present invention comprises steps of: forming an image of an object illuminated by illumination of the modulated light having given intensity as an optical image, and detecting the distance between individual points of the object on the basis of an image obtained by acquisition of the optical image with a given image pick-up gain. Under this method, either the given intensity or the image pick-up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which the three dimensional information can be followed real time within a period of time corresponding to the frame of a video signal. By utilization of the intensity or image pick-up gain which is changed with time, the two dimensional distribution of intensity of light~~

~~including information pertaining to the distance between the respective points of the object is acquired. Accordingly, the distance between respective points of the object can be determined on the basis of the intensity level information, whereby three dimensional information pertaining to the object can be detected.~~

~~{0009}~~

~~The image of the object can be acquired a plurality of times within the period of time corresponding to one frame of the video signal. In such a case, a signal to noise ratio (S/N) is improved by means of the storage effect of the image pick up element, and the image pick up intensity is enhanced.~~

~~{0010}~~

~~A device for detecting three dimensional information of the present invention comprises a projection section capable of projecting illumination light having given intensity on an object; an image pick up section capable of acquiring an image of the object with a given image pick up gain; and a signal processing section which calculates the distance between respective points of the object on the basis of intensity level information included in a video signal output from the image pick up section. Either the given intensity or the image pick up gain is changed with time, and the distance between respective points of the object can be detected at a speed at which the three dimensional information can be followed real time within a period of time corresponding to the frame of a video signal. By utilization of the intensity or image pick up~~



~~gain which is changed with time, the two dimensional distribution of intensity of the image of the object that is acquired by the image pick up section includes information pertaining to the distance between the respective points of the object. Accordingly, the signal processing section can calculate the distance between respective points of the object on the basis of the intensity level information. The device can acquire an image of the object within a sufficiently short period of time. So long as the signal processing section can compute the distance between respective points of the object at sufficient speed, the distance between respective points of the object can be detected at a speed at which the three dimensional information can be followed within a period of time corresponding to the frame of a video signal.~~

~~{0011}~~

~~{Embodiments of the Invention}~~

~~Various embodiments of the present invention will be described hereinbelow by reference to the accompanying drawings. FIG. 1 is a schematic diagram showing a three dimensional information detecting device according to a first embodiment of the present invention. The device comprises a projection section 10 capable of illuminating an object with illumination light S6 whose amplitude is modulated; an image pick up section 11 which receives light S7 reflected from the object while changing an image pick up gain with time and captures an optical image of the object; a signal processing section 7 for converting video signals S41 and S42 output from the~~

image pick-up section 11 into a three dimensional information signal S5; and a signal generation section 1 which produces an illumination light modulation signal S1, an image pick-up modulation signal S2, and a control signal S3. The specific configuration of these constituent elements will be described later.

{0012}

The principle behind the three dimensional information detecting method of the present invention which uses the device shown in FIG. 1 will be described by reference to a specific example in which the intensity of the light source or an image pick-up gain is linearly changed with time.

{0013}

The three dimensional information detecting method according to a first embodiment of the present invention will be described by reference to FIGS. 2 and 3. As shown in FIG. 2A, the intensity  $I$  of illumination light is subjected to amplitude modulation, to thereby obtain  $I=St$ , where " $t$ " represents time and " $S$ " represents the rate of increase in intensity ( $=2I_0/T$ ). As shown in FIG. 2B, the intensity  $I_R$  of light reflected from the object which is spaced by only distance " $d$ " away from an exit of the projection section 10 is changed, as specified by  $S(t-2d/v)$ , with a delay equal to a duration of time during which light travels between the projection section and the object ( $=2d/v$ , where " $v$ " represents light speed). If reflected light having intensity  $I$  at certain time  $t=t_0$  is acquired for only a short period of time  $t$  ( $\ll T$ ) while an

image pick-up gain “g” is taken as  $g=g_0 (>0)$ , the intensity  $I_+$  of the resultant image is expressed by Equation (1):

$$\{0014\}$$

$$\dots(1)$$

where represents the area of the backward scattering cross section of an object. Equation (1) includes information pertaining to the distance between the object and the three dimensional information detecting device. In order to eliminate the dependency of term , the second image of the object is acquired while the intensity  $I$  of illumination light is uniformly maintained at  $I=I_r$  for a short period of time  $t$  from time  $T'$ . At this time, luminous intensity  $I_{refg0}$  is expressed by Equation (2):

$$\{0015\}$$

$$\dots(2)$$

The following equation is derived from Equations (1) and (2):

$$\dots(3)$$

From Equation (3), we have

$$\dots(4):$$

Further, let  $I_r=I_0$ ; then

$$\dots(5):$$

From Equation (4) or (5), we have distance “d.”

{0016}

~~As mentioned above, the intensity of respective points of an optical image formed by collection of the light reflected from the object exposed to amplitude modulated light includes information pertaining to the distance between the three dimensional information detecting device and a corresponding point of the object. So long as the object is captured in the manner as mentioned above and Equation (4) or (5) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two dimensionally obtained, whereby three dimensional information pertaining to the object can be detected.~~

{0017}

~~As shown in FIGS. 3A and 3B, even when the intensity  $I$  of the light source diminishes, as specified by  $I=I_0 \sin \theta$ , the distance "d" can be obtained in the same manner as mentioned previously.~~

{0018}

~~...(6)~~

~~...(7)~~

~~...(8)~~

~~Further, let  $I_r=I_0$ ; then~~

~~...(9).~~

~~As in the case of the previous example, the optical image formed by collection of light reflected from the object. So long as Equation (8) or (9) is applied to each of the pixels of the image, information pertaining to the distance between the respective points of the object are two dimensionally obtained, whereby three dimensional information pertaining to the object can be obtained.~~

~~{0019}~~

~~Referring to FIG. 4, a three dimensional information detecting method according to a second embodiment of the present invention will now be described. As shown in FIG. 4, the object is illuminated while the intensity of illumination light is modulated by employment of a triangular waveform. An optical image of reflected light is acquired twice; in other words, an optical image of reflected light whose intensity is  $I_1$  is acquired at time  $t=t_0$  for only a short period of time  $t$  ( $\ll T$ ) with an image pick up gain  $g=g_0(>0)$ , and an optical image of reflected light whose intensity is  $I$  is acquired at time  $t=t_0+T/2$  for only a short period of time  $t$  ( $\ll T$ ) with the image pick up gain  $g=g_0(>0)$ . From Equations (1) and (6), we have~~

~~...(10)~~

~~...(11).~~

~~Let the wavelength of illumination light modulated by a triangular waveform be defined as  $\lambda=T$ ; then from  $S=I_0/(T/2)$ , we have~~

~~...(12).~~

~~Further, if  $t_0$  is set to a given value, distance "d" can be expressed as a relative distance with reference to a reference point  $d_{ref}$ . Equation (13) represents a relative distance with reference to  $d_{ref}=0$  when  $t_0=T/4$ .~~

~~{0020}~~

~~...(13)~~

~~As in the case of the first embodiment, the optical image is formed by collection of light reflected from the object. So long as any one of Equations (11), (12), and (13) is applied to each of the pixels of the image, information pertaining to the distance between the respective points of the object are two dimensionally obtained, whereby three dimensional information pertaining to the object can be obtained.~~

~~{0021}~~

~~According to a method which is complementary to the three dimensional information detecting methods described in connection with the first and second embodiments, three dimensional information pertaining to an object can be detected by capturing the image of the object with an image pick up gain, which linearly increases or decreases, through use of illumination light modulated in the form of a pulse for a short period of time.~~

~~{0022}~~

~~A three-dimensional information detecting method according to a third embodiment of the present invention will be described by reference to FIGS. 5 and 6. As shown in FIG. 5A, illumination light is modulated such that an image pick up gain "g" is linearly increased (i.e.,  $g=Ut$ ). Further, an object is exposed to light which illuminates like a pulse with intensity  $I=I_0$  for only a short period of time  $t$  ( $\ll T$ ). Here,  $U$  designates the rate of increase in image pick up sensitivity ( $=2g_0/T$ ). The image pick up gain  $g_+$  obtained when the light reflected from the object that is spaced only distance "d" from the three-dimensional information detecting device has returned to the image pick up device becomes  $g_+=U(t_0+2d/v)$ . The intensity  $I_{rOg+}$  of an image resulting from the reflected light being captured is expressed by Equation (14).~~

{0023}

...(14)

~~Further, in order to eliminate the dependency of term , the object is illuminated for a short period of time  $t$  from time  $T'$  while the image pick up gain "g" is uniformly maintained at  $g=g_r$ . At this time, luminous intensity  $I_{rOg_r}$  is expressed by Equation (15).~~

{0024}

...(15)

~~The following equation is derived from Equations (14) and (15).~~

...(16)

From Equation (16), we have

$$\dots(17)$$

Further, suppose  $g=g_0$ ; the following expression is derived from  $U=g_0/(T/2)$ .

$$\dots(18)$$

The distance "d" is derived from Equation (17) or (18). As in the case of the first and second embodiments, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (17) or (18) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three dimensional information pertaining to the object can be detected.

{0025}

As shown in FIG. 25, even when the image pick up gain "g" decreases ( $g=g_0 U t$ ), the distance "d" can be obtained in the same manner as that employed previously.

{0026}

$$\dots(19)$$

$$\dots(20)$$

$$\dots(21)$$



Further, let  $g_r = g_0$ ; then

...(22)

As mentioned previously, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (21) or (22) is applied to the intensity of each of the pixels of the image, information pertaining to the distance between the respective points of the object are two-dimensionally obtained, whereby three-dimensional information pertaining to the object can be detected.

{0027}

A three-dimensional information detecting method according to a fourth embodiment of the present invention will now be described by reference to FIGS. 7A and 7B. As shown in FIG. 7A, the image pick-up gain "g" is modulated through use of a triangular waveform, and an object is illuminated twice; in other words, an optical image is illuminated at time  $t=t_0$  through use of light which illuminates in a pulsating manner with intensity  $I=I_0$  for only a period of time  $t$  ( $\ll T$ ), and an object is illuminated at time  $t=t_0+T/2$  through use of light which illuminates in a pulsating manner with intensity  $I=I_0$  for only a period of time  $t$  ( $\ll T$ ). From Equations (15) and (19), we have

...(23)

...(24)

~~Suppose the wavelength of the triangular waveform used for modulating the image pick up sensitivity is defined as  $=T$  for convenience's sake, the following expression is derived from  $U=g_0/(T/2)$ .~~

~~...(25)~~

~~As in the case of the second embodiment, if  $t_0$  is set to a given value, the distance "d" can be expressed as a relative distance with reference to the reference point  $d_{ref}$ . Equation (26) represents the relative distance with reference to  $d_{ref}=0$  when  $t_0=T/4$ .~~

~~...(26)~~

~~As mentioned previously, an optical image formed by collection of the light reflected from the object is captured. So long as Equation (24), (25), or (26) is applied to each of the pixels of the image, information pertaining to the distance between the three dimensional information detecting device and the respective points of the object are two dimensionally obtained, whereby three dimensional information pertaining to the object can be detected.~~

~~{0029}~~

~~A method of increasing the image pick up sensitivity in each of the previous embodiments will now be described. In the previously embodiments, acquisition of an image having intensity  $I+g_0$  and an image having intensity  $I_{ref}g_0$  for the purpose of determining  $R+$ , acquisition of an image having intensity  $I_g$  and an image having intensity  $I_{ref}g_0$  for the purpose of obtaining~~

~~R, or acquisition of an image having intensity  $I+g_0$  and an image having intensity  $I-g_0$  for the purpose of determining R is performed a plurality of times within the period of time corresponding to one frame of an image signal. As a result, the signal to noise ratio (S/N) is improved by the storage effect of the image pick up element used for acquiring an image, whereby the image pick-up sensitivity is improved.~~

{0030}

~~The configuration of the three dimensional information detecting device shown in FIG. 1 will now be described in detail by reference to the drawings.~~

{0031}

~~FIG. 8 shows a projection section 10a which is another embodiment of the projection section 10 shown in FIG. 1. The projection section 10a comprises a light emitting element 31 whose light can be directly modulated by an illumination modulation signal S1, and an illumination optical system 30 which is disposed opposite the light exit surface of the light emitting element 31, which shapes the light emitted from the light emitting element 31, and which directs the light toward the object. For example, a semiconductor laser diode or a semiconductor light emitting diode can be employed as the light emitting element 31. When such a light emitting element is activated directly by the illumination light modulation signal S1 which is an electric signal, the element can emanate light whose intensity is changed at high speed. The thus~~

~~produced light is shaped by means of an illumination optical system 30 so as to illuminate an object, whereby illumination light S6 is produced. Accordingly, illumination light whose intensity is arbitrarily changed at high speed, such as increment light, decrement light, or pulse-like light, can be realized by means of the illumination light modulation signal S1. As mentioned above, the projection section having the configuration shown in FIG. 8 can be used as means for controlling the intensity of illumination light under the three dimensional information detecting method of the present invention.~~

{0032}

~~FIG. 9 shows a projection section 10b which is still another embodiment of the projection section 10 shown in FIG. 1. The projection section 10b comprises a light emitting element 33 which outputs given light; an external modulator 32 which is disposed opposite the light exit surface of the light emitting element 33 and indirectly modulates the light emanated from the light emitting element 33 in accordance with the illumination light modulation signal S1; and an illumination optical system 30 which shapes the light output from the external modulator 32 and is directed toward the object. An electro optical effect light modulator or an electro acoustic effect modulator can be used as the external modulator 32. Light whose intensity is modulated arbitrarily and at high speed can be produced by indirect modulation of the given light 34 output from the light emitting element 34,~~

through use of the external modulator 32. The thus produced light is shaped by the illumination optical system 30 so as to illuminate an object, whereby the illumination light S6 is produced. Like the projection section shown in FIG. 8, the projection section whose configuration is shown in FIG. 9 can be used as means for controlling the intensity of illumination light under the three-dimensional information detecting method of the present invention.

{0033}

FIG. 10 shows an image pick up section 11 which is another embodiment of the image pick up section 11 shown in FIG. 1. The image pick up section 11 comprises a lens 4 which receives light reflected from an object and produces an optical image, an image pick up element 6 which is disposed behind the lens 4 and picks up the optical image output from the lens 4, and an image split circuit 22 which outputs a video signal pertaining to a plurality of screens included in the electric signal output from the image pick up element 6 while the video signal is divided into respective screens. Further, an image intensifier with gating operation 5 capable of controlling the image pick up gain in accordance with the image pick up gain modulation signal S2, which is an electric signal, is attached to the front surface of the image pick up element 6 via an optical image transfer optical system 20. A fiber plate or lens can be used as the optical image transfer optical system 20. Light S7 reflected from an object is formed on a photo electric screen of the image intensifier with gating operation 5 by means of the lens 4. An optical image amplified by

~~the image intensifier with gating operation 5 is transferred by the optical image transfer optical system 20 and input to the photo electric screen of the image pick up element 6.~~

[0034]

~~The light amplification gain of the image intensifier with gating operation 5 can be controlled at high speed by means of a voltage to be applied to a gate 21 of the image intensifier with gating operation 5. In the image pick up section 11, the image pick up gain can be changed at high speed by application of the image pick up gain modulation signal S2 to the gate 21. Accordingly, an image pick up gain which is changed arbitrarily at high speed, such as a pulse like image pick up gain to be used for releasing a shutter for only a short period of time or an increment or decrement image pick up gain, can be achieved.~~

[0035]

~~In a case where the image pick up section 11 is used in each of the previous embodiments, the image pick up section 11 must acquire an image twice for calculating  $R+$ ,  $R-$ , or  $R$  and output a video signal pertaining to two screens per frame while the signal is split. To this end, in the image pick up section 11, the image pick up element 6 is activated twice as fast as it is activated in normal times, to thereby acquire a video signal pertaining to two images. The video signal is output from the image split circuit 22 while being divided into a video signal S41 and a video signal S42. Alternatively, so long~~

~~as there is employed an image pick-up element capable of acquiring an image for each pixel and at every image pick-up operation while effecting switching between the video signal S41 and the video signal S42, the video signals 41 and 42 can be output while they are split.~~

{0036}

~~As mentioned above, the image pick-up section 11 whose configuration is shown in FIG. 10 can be used as means for controlling the image pick-up gain under the three dimensional information detecting method of the present invention. Further, the image pick-up section 11 can also be used as means for outputting two video signals resulting from twice acquisition of an image while being split.~~

{0037}

~~FIG. 11 shows a signal processing section 7 which is an embodiment of the signal processing section 7 shown in FIG. 1. In this signal processing section 7, an internal signal is driven at a rate which is the same as the number of pixels of the video signal and is subjected to pipe line processing in individual circuits. After a synchronous signal has been eliminated from the video signals S41 in a synchronous signal separation circuit 41, the video signal S43 is stored in an image pick-up level storage circuit 1, and the video signal S44 is stored in an image pick-up level storage circuit 2. A signal S45 output from the image pick-up level storage circuit 1 and a signal S46 output from the image pick-up level storage circuit 2 are input to a computation~~

circuit 44, where  $R_+$ ,  $R_-$ , or  $R$  and the distance "d" are computed. A signal S47 output from the computation circuit 44 is a time series signal resulting from two dimensional scanning of the distance between the respective sections of the object. Time axis fluctuations in the signal S47 are corrected by a storage circuit 45, and a synchronous signal is added to the thus corrected signal by a synchronous signal addition circuit 46. The signal is output as a three dimensional signal S5 whose video level corresponds to the value of information pertaining to the distance "d" between the respective points of the object. As mentioned above, the signal processing section 7 whose configuration is shown in FIG. 11 can be used as a means for computing three dimensional information pertaining to an object in real time under the three dimensional information detecting method of the present invention.

{0038}

{Advantageous Result of the Invention}

As has been described in detail, the present invention enables two dimensional determination of the distance between individual points of an object at a speed at which the three dimensional information can be followed real time within a period of time corresponding to the frame of a video signal, as well as detection of three dimensional information, by utilization of information pertaining to the intensity of an image of the object acquired under condition that either the intensity of illumination light or an image pick-up gain is changed with time. Consequently, the method and apparatus of the



~~present invention can be suitably used for acquiring a three dimensional motion picture of an object.~~

~~{BRIEF DESCRIPTION OF THE DRAWINGS}~~

~~FIG. 1 is a schematic diagram showing the configuration of a three dimensional information detecting device according to a first embodiment of the present invention;~~

~~FIG. 2 is an illustration for describing a method of detecting three dimensional information by utilization of illumination light which linearly increases and has given intensity and a pulse like image pick up gain in combination, wherein FIG. 2A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain "g," and FIG. 2B shows a time varying waveform determined by the image pick up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";~~

~~FIG. 3 is an illustration for describing a method of detecting three dimensional information by utilization of illumination light which linearly decreases and has given intensity and a pulse like image pick up gain in combination, wherein FIG. 3A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain "g," and FIG. 3B shows a time varying waveform determined by the image pick up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";~~

~~FIG. 4 is an illustration for describing a method of detecting three-dimensional information by utilization of illumination light which linearly increases and decreases and has given intensity and a pulse like image pick up gain in combination, wherein FIG. 4A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain " $g$ ," and FIG. 4B shows a time varying waveform determined by the image pick up gain " $g$ " and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance " $d$ ";~~

~~FIG. 5 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick up gain which linearly increases and illumination light having pulse like intensity in combination, wherein FIG. 5A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain " $g$ ," and FIG. 5B shows a time varying waveform determined by the image pick up gain " $g$ " and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance " $d$ ";~~

~~FIG. 6 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick up gain which linearly decreases and illumination light having a pulse like intensity in combination, wherein FIG. 6A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain " $g$ ," and FIG. 6B shows a time varying waveform determined by the image pick up gain " $g$ "~~

and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";

FIG. 7 is an illustration for describing a method of detecting three-dimensional information by utilization of a given image pick up gain which linearly increases and decreases and illumination light having pulse like intensity in combination, wherein FIG. 7A shows a time varying waveform determined by the intensity  $I$  of illumination light and an image pick up gain "g," and FIG. 7B shows a time varying waveform determined by the image pick up gain "g" and the intensity  $I_R$  of light reflected from an object spaced away from a projection section by only distance "d";

FIG. 8 is a schematic diagram showing the configuration of a projection section equipped with a light emitting element whose light is directly modulated;

FIG. 9 is a schematic diagram showing the configuration of a projection section equipped with a light emitting element whose light is indirectly modulated;

FIG. 10 is an illustration showing the configuration of an image pick-up section employing an image intensifier (II) with gating operation;

FIG. 11 is an illustration showing the configuration of a signal processing section;

~~FIG. 12 is an illustration showing a conventional method of measuring the distance between an object and a three dimensional information detecting device on the basis of a lag time or modulated phase of a reflected laser beam;~~

~~FIG. 13 is an illustration showing a conventional method of activating a laser beam so as to effect two dimensional scanning; and~~

~~FIG. 14 is an illustration showing the configuration of a conventional imaging laser radar apparatus.~~

~~{Description of the Reference Numerals}~~

~~1 ... signal generation section, 4 ... lens, 5 ... image intensifier with gating operation, 6 ... image pick up element, 7 ... signal processing section, 10 ... projection section, 11 ... image pick up section, 20 ... optical image transfer optical system, 21 ... gate, 22 ... image split circuit, 30 ... illumination optical system, 31 ... light emitting element, 32 ... external modulator~~

~~{DOCUMENT NAME} ABSTRACT OF THE DISCLOSURE~~

~~{Abridgment}~~

~~{Object} It is an object of the present invention to provide a method and apparatus which can be applied for acquiring a three dimensional image~~

~~of an object and detect three dimensional information pertaining to the object  
real time within a period of time corresponding to the frame of a video signal.~~

~~{Means for Achieving the Object}}~~

### **[ABSTRACT OF THE DISCLOSURE]**

An image of an object illuminated by illumination light having given intensity is formed as an optical image. The distance between respective points of the object is determined on the basis of a video which is obtained by acquiring the optical image with a given image pick-up gain. Here, either the intensity of the illumination light or the image pick-up gain is changed with time. The distribution of intensity of the image acquired by utilization of such intensity or image pick-up gain reflects a time lag between the time at which the illumination light is emitted from a light source and the time at which the light reflected from individual points of the object reaches an image pick-up device. The distribution of intensity includes information pertaining to the distance between the light source and the respective points of the object.

~~{ The present invention enables detection of three dimensional information at a speed at which the three dimensional information can be followed real time within a period of time corresponding to the frame of the video signal.~~

~~{Characteristic Drawing} FIG. 1~~

~~{DOCUMENT NAME} DRAWINGS~~

~~{FIG. 1}~~

~~OBJECT~~

~~1 SIGNAL GENERATION SECTION~~

~~7 SIGNAL PROCESSING SECTION~~

~~10 PROJECTION SECTION~~

~~11 IMAGE PICK-UP SECTION~~

~~S1 ILLUMINATION LIGHT MODULATION SIGNAL~~

~~S2 IMAGE PICK-UP GAIN MODULATION SIGNAL~~

~~S3 CONTROL SIGNAL~~

~~S5 THREE-DIMENSIONAL INFORMATION SIGNAL~~

~~S6 ILLUMINATION LIGHT~~

~~S7 REFLECTED LIGHT~~

~~S41, S42 VIDEO SIGNAL~~

~~[FIG. 8]~~

~~LIGHT-EMITTING-ELEMENT~~

~~S1-ILLUMINATION-LIGHT-MODULATION-SIGNAL~~

~~S6-ILLUMINATION-LIGHT~~

~~10A-PROJECTION-SECTION~~

~~30-ILLUMINATION-OPTICAL-SYSTEM~~

~~[FIG. 9]~~

~~10B-PROJECTION-SECTION~~

~~S1-ILLUMINATION-LIGHT-MODULATION-SIGNAL~~

~~S3-LIGHT-EMITTING-ELEMENT~~

~~S6-ILLUMINATION-LIGHT~~

~~30-ILLUMINATION-OPTICAL-SYSTEM~~

~~33-LIGHT-EMITTING-ELEMENT~~

~~34-FIXED-LIGHT~~

~~[FIG. 10]~~

~~4-LENS~~

~~5-IMAGE-INTENSIFIER-WITH-GATING-OPERATION~~



~~6 IMAGE PICK-UP ELEMENT~~

~~11 IMAGE PICK-UP SECTION~~

~~20 OPTICAL IMAGE TRANSFER OPTICAL SYSTEM~~

~~21 GATE~~

~~22 IMAGE SPLIT CIRCUIT~~

~~S2 IMAGE PICK-UP GAIN MODULATION SIGNAL~~

~~S3 CONTROL SIGNAL~~

~~S7 LIGHT REFLECTED FROM OBJECT~~

~~S41 VIDEO SIGNAL~~

~~S42 VIDEO SIGNAL~~

~~{FIG. 11}~~

~~7 SIGNAL PROCESSING SECTION~~

~~41 SYNCHRONOUS SEPARATION CIRCUIT~~

~~42 IMAGE PICK-UP LEVEL STORAGE CIRCUIT 1~~

~~43 IMAGE PICK-UP LEVEL STORAGE CIRCUIT 2~~

~~44 COMPUTATION CIRCUIT~~

~~45 STORAGE CIRCUIT~~

~~46 SYNCHRONOUS SIGNAL ADDITION CIRCUIT~~

~~S3 CONTROL SIGNAL~~

~~S5 THREE DIMENSIONAL INFORMATION SIGNAL~~

~~S41 AND S42 VIDEO SIGNAL~~

~~S47 SYNCHRONOUS PHASE CONTROL CIRCUIT~~

~~[FIG. 12]~~

~~PULSE LASER~~

~~HALF MIRROR~~

~~REFLECTED PULSE~~

~~OBJECT~~

~~STOP~~

~~START~~

~~TIME COUNT CIRCUIT~~

~~TIME DURING WHICH LASER BEAM TRAVELS~~

~~START~~

~~STOP~~

~~TIME DURING WHICH THE LASER BEAM TRAVELS BACK AND  
FORTH, DISTANCE~~

~~LASER (CONTINUOUS WAVE)~~

~~AMPLITUDE MODULATION~~

~~REFLECTED LIGHT~~

~~OBJECT~~

~~OSCILLATION CIRCUIT~~

~~PHASE DIFFERENCE DETECTION CIRCUIT~~

~~TIME DURING WHICH LASER BEAM TRAVELS~~

~~TRANSMITTED LASER BEAM~~

~~RECEIVED LASER BEAM~~

~~PHASE DIFFERENCE (AFTER THE LASER BEAM HAS TRAVELED  
BACK AND FORTH), DISTANCE~~

~~{FIG. 13}~~

~~PULSE LASER BEAM~~

~~COLLIMATOR~~

~~BEAM SCANNER~~

~~TARGET~~

~~COLLIMATOR~~

~~PHOTO MULTIPLEXER~~

~~CONSTANT RATIO THRESHOLD VALUE CIRCUIT~~

STOP

~~TIME TO PULSE HEIGHT CONVERTER~~

START

~~AVERAGING CIRCUIT~~

~~AD CONVERTER INTERFACE~~

~~BEAM SCANNER INTERFACE~~

COMPUTER

TARGET

~~9 MHz OSCILLATOR~~

~~15 mW HeNe LASER~~

~~OPTICAL MODULATOR~~

~~BEAM SPLITTER~~

~~SCANNER MOTOR~~

~~PHOTO MULTIPLEXER~~

~~9 MHz FILTER~~

~~NETWORK ANALYZER~~

AMPLITUDE

PHASE

computer

[FIG. 14]

9 TV CAMERA

41 SINUSOIDAL WAVEFORM OSCILLATOR

42A PHASE CONTROL

42B PHASE CONTROL

43A AMPLIFICATION

43B AMPLIFICATION

44 DC POWER

45 SUPERIMPOSING RF SIGNAL ONTO VIDEO SIGNAL

46 WAVEFORM SHAPING

47 FREQUENCY DIVISION AND DELAY

48 SETTING OF GATE WIDTH

[DESCRIPTION OF THE REFERENCE NUMERALS]

1 OBJECT

2 LASER BEAM

3 IMAGE INTENSIFIER TUBE

31 PHOTO-ELECTRIC SURFACE

32 FIBER OPTICAL PLATE

~~33 LIGHT RECEIVING SURFACE~~

~~41 SINUSOIDAL WAVE GENERATION CIRCUIT~~

~~42 PHASE CONTROL CIRCUIT~~

~~43 AMPLIFIER~~

~~44 DC POWER CIRCUIT~~

~~45 RF SIGNAL SUPERIMPOSING CIRCUIT~~

~~46 WAVEFORM SHAPING CIRCUIT~~



~~47 FREQUENCY DIVISION AND DELAY CIRCUIT~~

~~48 GATE WIDTH SETTING CIRCUIT~~

~~49 MCP GATE DRIVE CIRCUIT}~~

FIG. 12


-- PRIOR ART --

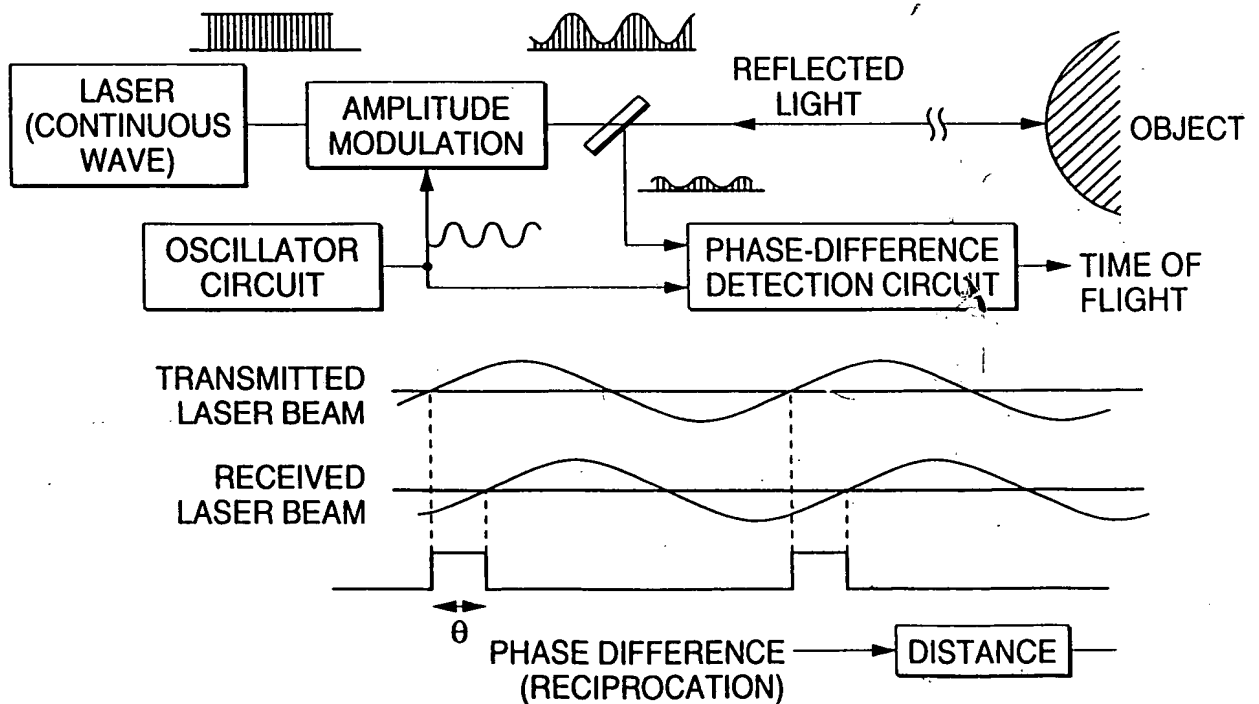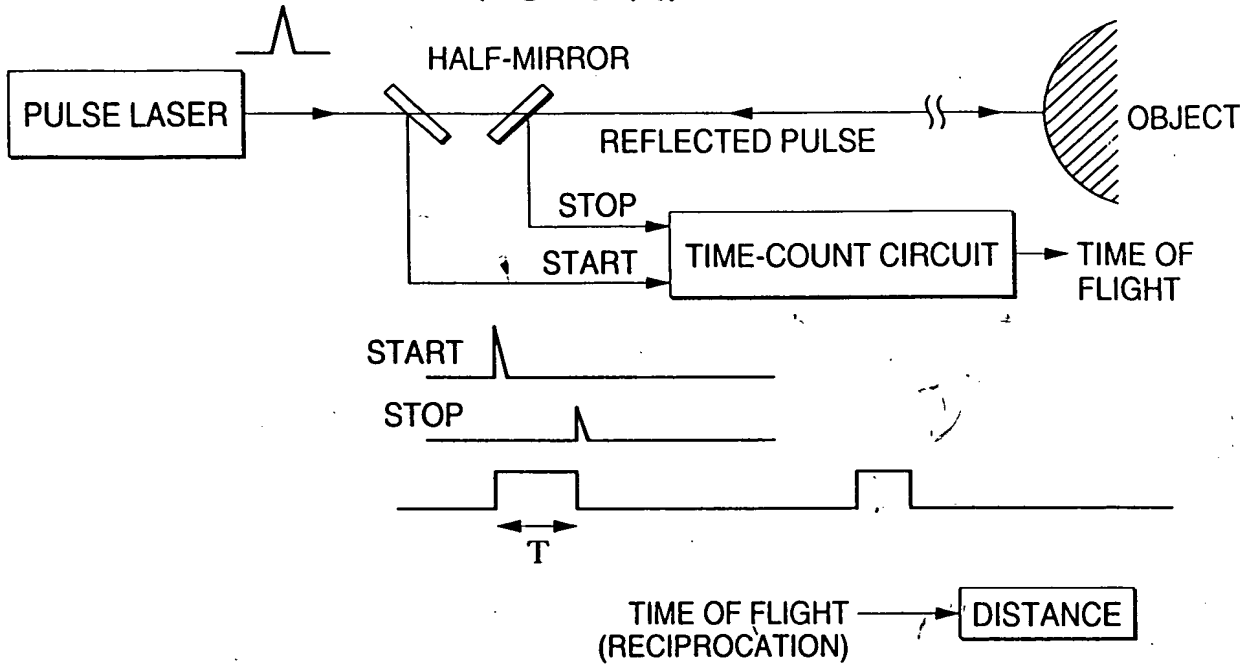

Approved  
3/28/03



— PRIOR ART —

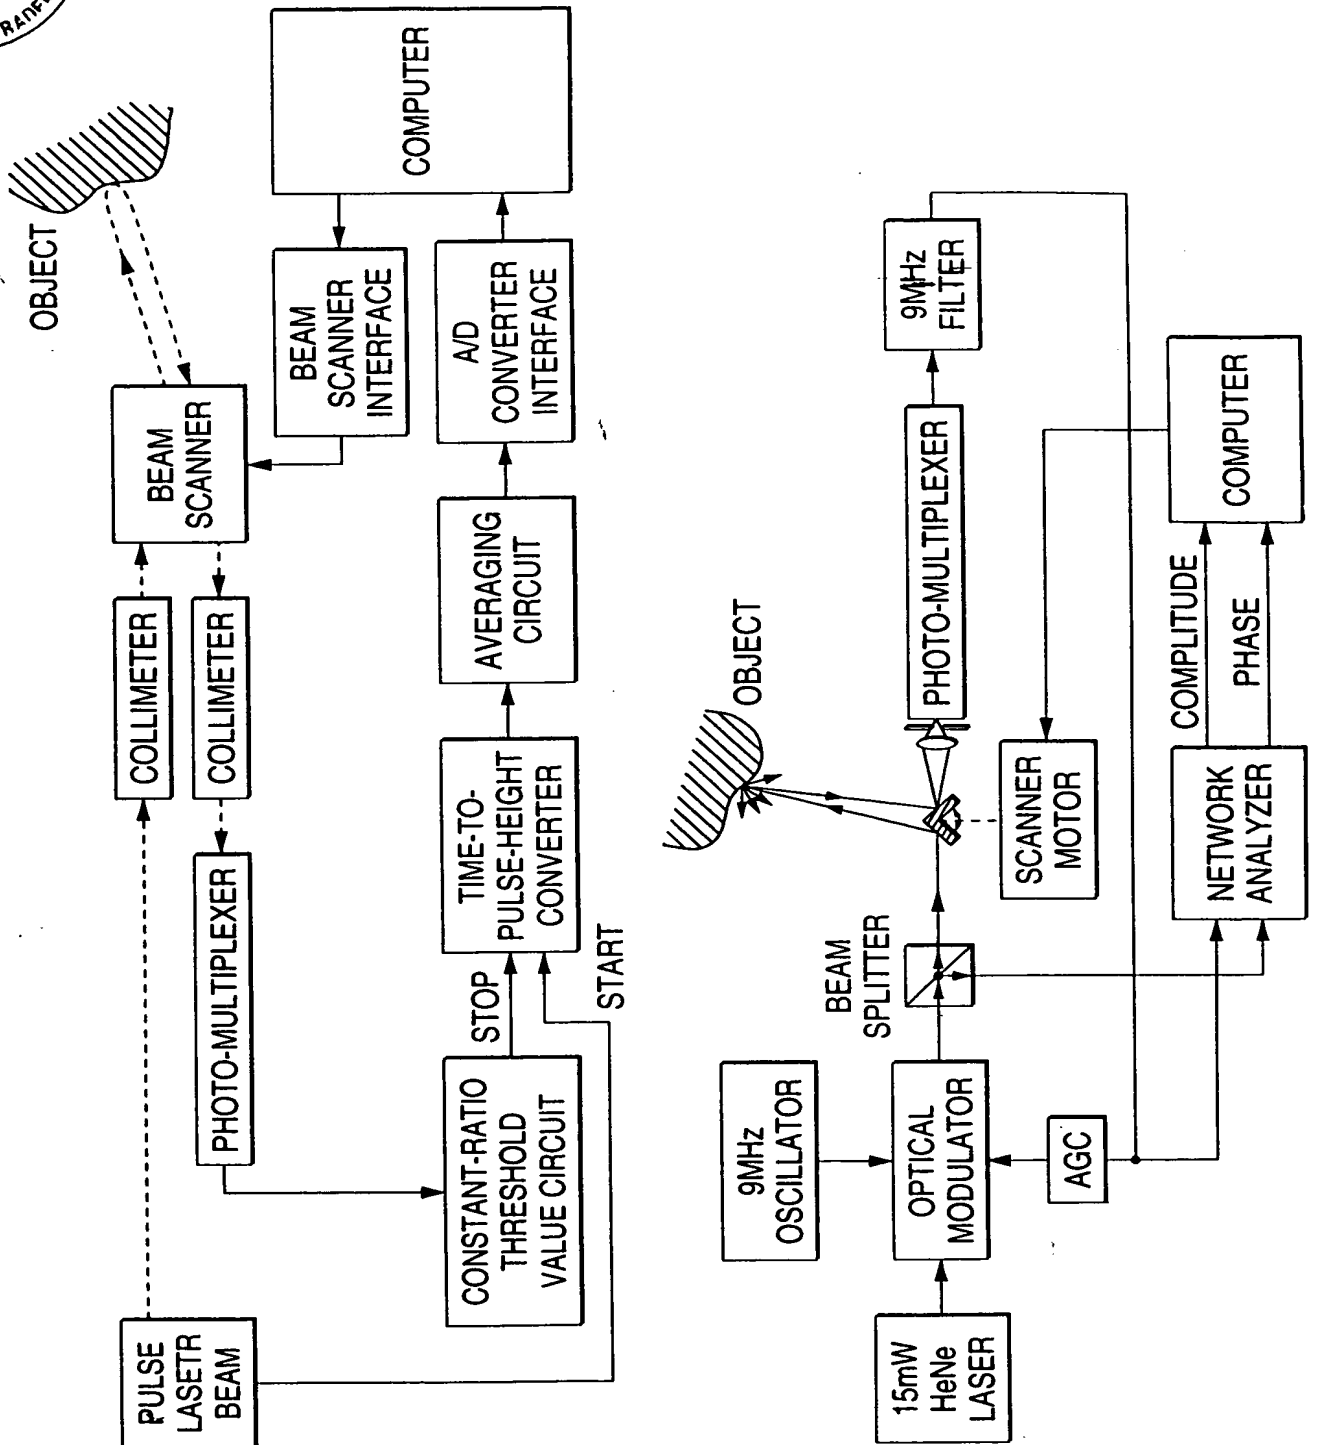



Approved  
3/28/03

FIG. 14

-- PRIOR ART --

